


RETICLE GUIDE

APR-1C MRAD (4-16 HELIX FFP)

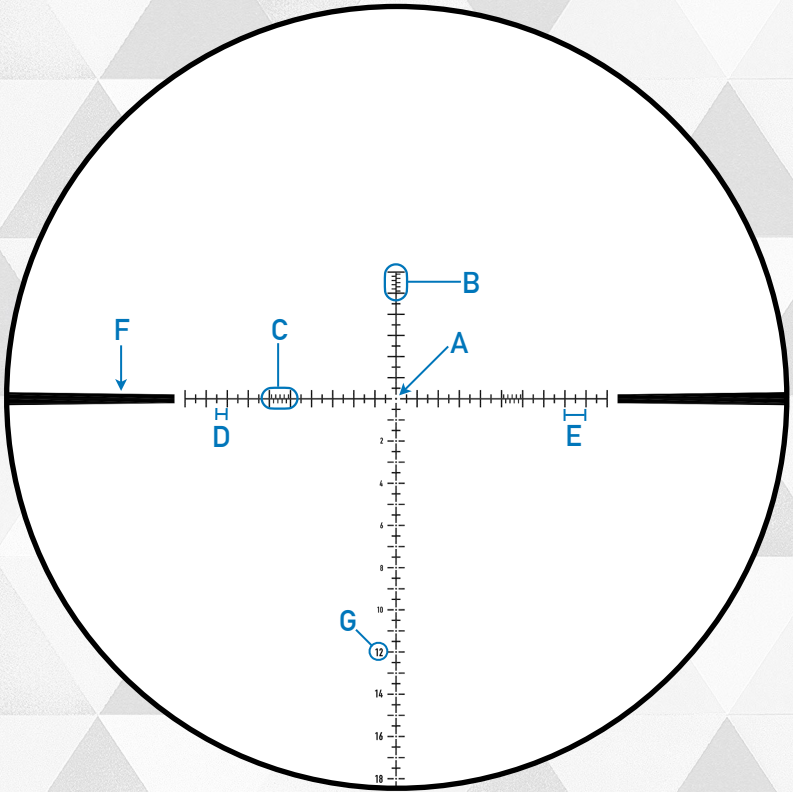

A	Center Dot	E	1 MIL Hash Lines
B+C	1/10 MIL Scale	F	Tapered Bars
D	0.5 MIL Hash Lines	G	Holdover Indication #

DESIGN FEATURES

APR stands for “All-Purpose Reticle”, and that’s the concept behind the design of the APR C & D variants. The “C” is the “clean”, or simpler of the two, with fewer markings than the “D” variant. The fine centre dot provides a precise aim point, and hash marks every 0.5 and 1 MRAD allow for elevation and wind holds.

MIL-SCALE:

The Mil-Scale on the horizontal & vertical crosshairs allow the shooter to measure objects downrange and quickly make adjustments. With one division equalling one click, the guesswork is gone.

CATERED FOR ALL MAGNIFICATIONS:

A line thickness of 0.045 (main crosshair) and 0.036 (mil-scale) is visible at low magnifications for hunting & target acquisition, while still being fine enough at full magnification for precision shooting applications.

NUMBERED MARKINGS:

Numbers on the vertical axis allow shooters to quickly find holdover points in pressure situations like PRS/NRL matches.

TAPERED BARS:

Bars on the left, right & bottom of the reticle taper out to the edge of your field of view, drawing your eye to the centre at all magnifications without becoming too thick or thin.