


Getting Started

1: Push the stock release button inwards and rotate counterclockwise from the 'locked' to the 'open' position.



2: Remove the stock cover to expose the stock screw.

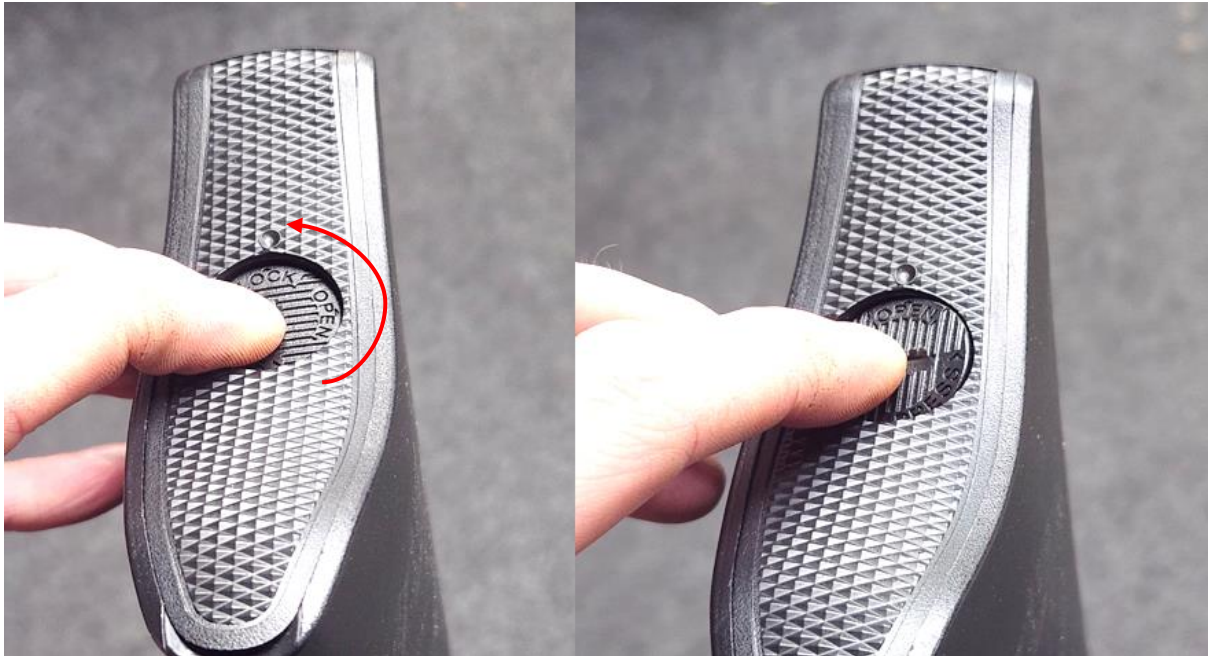

3: Using the stock cover, unscrew the stock screw. **Caution: Avoid unscrewing the stock screw if the gas pressure is still high in the rifle.**



4: Insert 2x 12g Co2 powerlets back-to-back.



5: Re-install the stock screw by screwing counterclockwise until you can hear the rifle pressurize. **Caution: Do not overtighten the stock screw.**



6: Re-Install the stock cover assembly by reversing the first step.